



Manufactured from durable Polyester

Washable and reusable

Bacteria and chemical resistant

HYDRONIX SPC SERIES POLYESTER PLEATED CARTRIDGES

are manufactured from durable polyester to provide you with a superior pleated cartridge that is durable, washable, and reusable. Hydronix SPC Series Pleated Cartridges are bacteria and chemical resistant and provide great dirt holding capacity to extend the time between cartridge change outs.

HYDRONIX SPC SERIES POLYESTER PLEATED CARTRIDGES

can be used in residential, commercial and industrial applications. The Polyester media is pleated around a Polypropylene core for added strength and the ends are immersed in a thermosetting Vinyl Plastisol which fuses the three components together forming a unified end cap and gasket.

HYDRONIX SPC SERIES POLYESTER PLEATED CARTRIDGES

are of a consistent and uniform quality and are unsurpassed in performance and value.



SPC SERIES

Polyester Pleated Cartridges

Materials of Construction

Filter Media: Non-woven Polyester
 End Caps: Vinyl Plastisol
 Core: Polypropylene

Temperature Rating

Temperature Range: 40°F to 125°F (4.4°C to 51.7°C)

2.5" DIAMETER SPECIFICATIONS

	Part Number	Description	Initial ΔP (psi) at Flow Rate (gpm)	Micron Rating
10"	SPC-25-1001	2.5" x 9 3/4"	1 psi at 10 gpm (.1 bar at 38 L/min)	1
	SPC-25-1005	2.5" x 9 3/4"	1 psi at 10 gpm (.1 bar at 38 L/min)	5
	SPC-25-1010	2.5" x 9 3/4"	1 psi at 10 gpm (.1 bar at 38 L/min)	10
	SPC-25-1020	2.5" x 9 3/4"	1 psi at 10 gpm (.1 bar at 38 L/min)	20
	SPC-25-1030	2.5" x 9 3/4"	1 psi at 10 gpm (.1 bar at 38 L/min)	30
	SPC-25-1050	2.5" x 9 3/4"	1 psi at 10 gpm (.1 bar at 38 L/min)	50
20"	SPC-25-2001	2.5" x 20"	1 psi at 20 gpm (.1 bar at 76 L/min)	1
	SPC-25-2005	2.5" x 20"	1 psi at 20 gpm (.1 bar at 76 L/min)	5
	SPC-25-2010	2.5" x 20"	1 psi at 20 gpm (.1 bar at 76 L/min)	10
	SPC-25-2020	2.5" x 20"	1 psi at 20 gpm (.1 bar at 76 L/min)	20
	SPC-25-2030	2.5" x 20"	1 psi at 20 gpm (.1 bar at 76 L/min)	30
	SPC-25-2050	2.5" x 20"	1 psi at 20 gpm (.1 bar at 76 L/min)	50

4.5" DIAMETER SPECIFICATIONS

	Part Number	Description	Initial ΔP (psi) at Flow Rate (gpm)	Micron Rating
10"	SPC-45-1001	4.5" x 9 3/4"	1 psi at 10 gpm (.1 bar at 38 L/min)	1
	SPC-45-1005	4.5" x 9 3/4"	1 psi at 10 gpm (.1 bar at 38 L/min)	5
	SPC-45-1010	4.5" x 9 3/4"	1 psi at 10 gpm (.1 bar at 38 L/min)	10
	SPC-45-1020	4.5" x 9 3/4"	1 psi at 10 gpm (.1 bar at 38 L/min)	20
	SPC-45-1030	4.5" x 9 3/4"	1 psi at 10 gpm (.1 bar at 38 L/min)	30
	SPC-45-1050	4.5" x 9 3/4"	1 psi at 10 gpm (.1 bar at 38 L/min)	50
20"	SPC-45-2001	4.5" x 20"	1 psi at 20 gpm (.1 bar at 76 L/min)	1
	SPC-45-2005	4.5" x 20"	1 psi at 20 gpm (.1 bar at 76 L/min)	5
	SPC-45-2010	4.5" x 20"	1 psi at 20 gpm (.1 bar at 76 L/min)	10
	SPC-45-2020	4.5" x 20"	1 psi at 20 gpm (.1 bar at 76 L/min)	20
	SPC-45-2030	4.5" x 20"	1 psi at 20 gpm (.1 bar at 76 L/min)	30
	SPC-45-2050	4.5" x 20"	1 psi at 20 gpm (.1 bar at 76 L/min)	50

SPC Series Flow Rates

Microns	2.5" x 10"	2.5" x 20"	4.5" x 10"	4.5" x 20"
1	4	8	15	25
5	7	14	15	25
10	7	14	15	25
20	8	16	15	25
30	8	16	15	25
50	10	20	15	25

Flow Rates in GPMs


WARNING: Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

HYDRONIX WATER TECHNOLOGY


P.O. Box 2235 Chino Hills, CA 91709 | USA

sales@hydronixwater.com • www.HydronixWater.com

SPC Performance

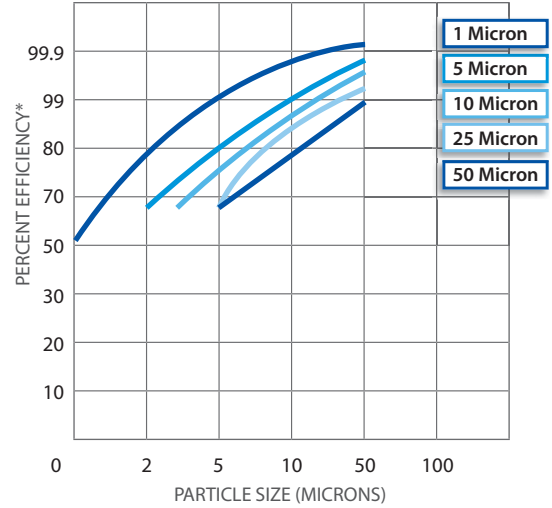

SPC Performance

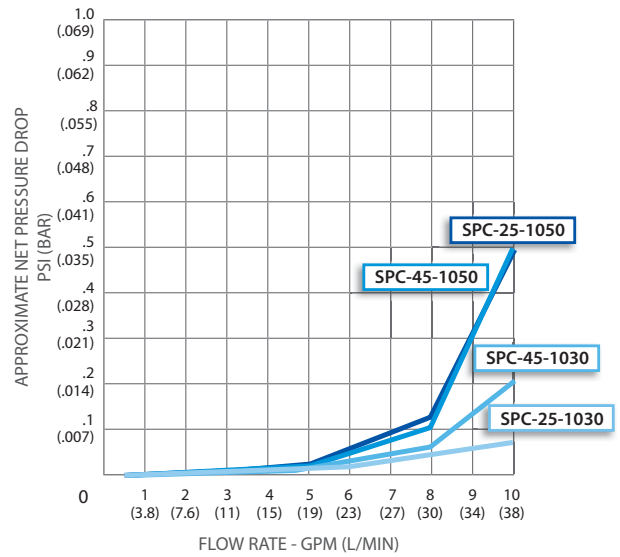

LIT-SPC-SS 05/03/16

Distributed by: