

## SBC Series

### Sediment Bonded Depth Cartridges

- ✓ Superior filtration performance
- ✓ Polypropylene center core for added strength
- ✓ Made with FDA CFR 21 approved material
- ✓ Thermally bonded Polypropylene



#### HYDRONIX SBC SERIES BONDED DEPTH CARTRIDGES

are specially designed thermally bonded Polypropylene filters that provide superior filtration performance. SBC Bonded Depth Cartridges utilize a durable Polypropylene center core for increased strength and structural integrity.

#### HYDRONIX SBC SERIES BONDED DEPTH CARTRIDGES

have fine grooves on the outside of the filter for increased surface area and will not impart color, taste and odor on the liquid being filtered. SBC cartridges produce consistent flow rates and have no fiber release, making them ideal for food and beverage applications.

#### HYDRONIX SBC SERIES BONDED DEPTH CARTRIDGES

are made with 100% pure polypropylene and are free of surfactants, detergents and anti-static agents. SBC series filter cartridges do not impart any substances into water which are known to or can cause adverse health effects to humans.



Tested and certified by NSF International to ANSI/NSF Standard 42 for material requirements only.

2.5" DIAMETER SPECIFICATIONS								
	Part Number	Description	Initial ΔP (psi) at Flow Rate (GPM)	Micron	Case Quantity	Box Dimension (Inches)	Weight (lbs)	Weight (kgs)
10"	SBC-25-1001	2.5" x 9 7/8"	<2 psi at 2 gpm (<0.14 bar at 7.6 L/min)	1	40	13 x 11 x 21	15	6.35
	SBC-25-1005	2.5" x 9 7/8"	<2 psi at 2 gpm (<0.14 bar at 7.6 L/min)	5	40	13 x 11 x 21	15	6.35
	SBC-25-1010	2.5" x 9 7/8"	<2 psi at 2 gpm (<0.14 bar at 7.6 L/min)	10	40	13 x 11 x 21	15	6.35
	SBC-25-1020	2.5" x 9 7/8"	<2 psi at 2 gpm (<0.14 bar at 7.6 L/min)	20	40	13 x 11 x 21	15	6.35
19 1/2"	SBC-25-1951	2.5" x 19 1/2"	<2 psi at 5 gpm (<0.14 bar at 19 L/min)	1	20	13 x 11 x 21	14	6.35
	SBC-25-1955	2.5" x 19 1/2"	<2 psi at 5 gpm (<0.14 bar at 19 L/min)	5	20	13 x 11 x 21	14	6.35
20"	SBC-25-2001	2.5" x 20"	<2 psi at 5 gpm (<0.14 bar at 19 L/min)	1	20	13 x 11 x 21	14	6.35
	SBC-25-2005	2.5" x 20"	<2 psi at 5 gpm (<0.14 bar at 19 L/min)	5	20	13 x 11 x 21	14	6.35
	SBC-25-2010	2.5" x 20"	<2 psi at 5 gpm (<0.14 bar at 19 L/min)	10	20	13 x 11 x 21	14	6.35
	SBC-25-2020	2.5" x 20"	<2 psi at 5 gpm (<0.14 bar at 19 L/min)	20	20	13 x 11 x 21	14	6.35
	SBC-25-2050	2.5" x 20"	<2 psi at 5 gpm (<0.14 bar at 19 L/min)	50	20	13 x 11 x 21	14	6.35
29 1/4"	SBC-25-29141	2.5" x 29 1/4"	<2 psi at 9 gpm (<0.14 bar at 34 L/min)	1	20	13 x 11 x 31	22	9.97
	SBC-25-29145	2.5" x 29 1/4"	<2 psi at 9 gpm (<0.14 bar at 34 L/min)	5	20	13 x 11 x 31	22	9.97
	SBC-25-291410	2.5" x 29 1/4"	<2 psi at 9 gpm (<0.14 bar at 34 L/min)	10	20	13 x 11 x 31	22	9.97
30"	SBC-25-3001	2.5" x 30"	<2 psi at 9 gpm (<0.14 bar at 34 L/min)	1	20	13 x 11 x 31	22	9.97
	SBC-25-3005	2.5" x 30"	<2 psi at 9 gpm (<0.14 bar at 34 L/min)	5	20	13 x 11 x 31	22	9.97
	SBC-25-3010	2.5" x 30"	<2 psi at 9 gpm (<0.14 bar at 34 L/min)	10	20	13 x 11 x 31	22	9.97
	SBC-25-3020	2.5" x 30"	<2 psi at 9 gpm (<0.14 bar at 34 L/min)	20	20	13 x 11 x 31	22	9.97
	SBC-25-3050	2.5" x 30"	<2 psi at 9 gpm (<0.14 bar at 34 L/min)	50	20	13 x 11 x 31	22	9.97
39"	SBC-25-3901	2.5" x 39"	<2 psi at 13 gpm (<0.14 bar at 49 L/min)	1	20	13 x 11 x 41	28	12.70
	SBC-25-3905	2.5" x 39"	<2 psi at 13 gpm (<0.14 bar at 49 L/min)	5	20	13 x 11 x 41	28	12.70
40"	SBC-25-4001	2.5" x 40"	<2 psi at 13 gpm (<0.14 bar at 49 L/min)	1	20	13 x 11 x 41	30	13.61
	SBC-25-4005	2.5" x 40"	<2 psi at 13 gpm (<0.14 bar at 49 L/min)	5	20	13 x 11 x 41	30	13.61
	SBC-25-4005-S5	2.5" x 40", 222/FIN	<2 psi at 13 gpm (<0.14 bar at 49 L/min)	5	20	13 x 11 x 41	31	14.06

**WARNING:** Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system. Hydronix SBC Sediment Depth Cartridges comply with FDA CFR21 regulations for use in food and beverage applications.

## Features & Benefits

- Thermally bonded Polypropylene micro fiber construction for higher filtration efficiency
- SBC cartridges will not impart taste, odor or color to water being filtered
- Polypropylene construction provides superior chemical resistance and resists bacterial attack
- SBC cartridges have no fiber release, consistent flow rate and superior filtration performance
- Comply with FDA CFR 21 regulations for use in food and beverage applications

## Temperature Range

- 40°F to 175°F (4.4°C to 79.4°C)

## Product Applications


- Electric components
- Plating
- Parts washing
- Pulp and paper
- Ink
- Bottled water
- Soft drinks
- Juice
- Oil and gas
- Pre-RO
- Rinse water

## Operating Data


Maximum Differential Pressure  
15 psid at 175°F (1.0 bar at 80°C)  
25 psid at 140°F (1.7 bar at 60°C)  
60 psid at 68°F (4.13 bar at 20°C)

Recommended Change Out  
Differential Pressure  
35 psi (2.4 bar)

## Flow Detail

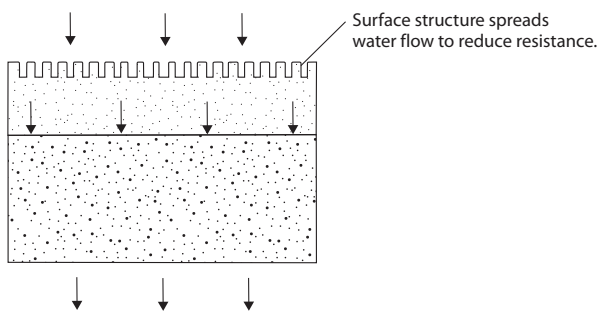


## Distributed by:



## Materials of Construction

Filter Media: Polypropylene

## SBC Performance

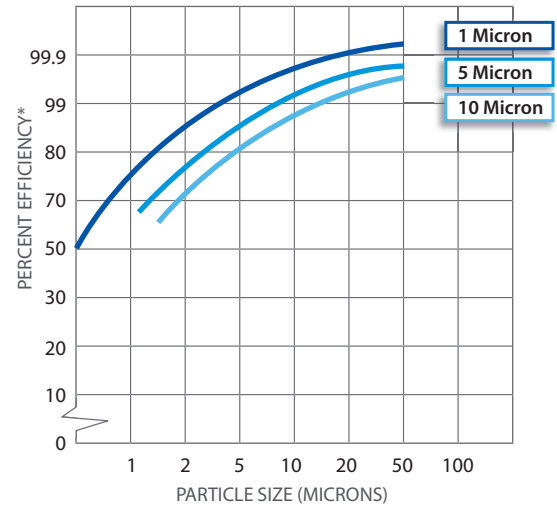

## Model # Guide


Sediment Bonded Depth Cartridge      Length      O-Ring Material


**SBC-25-1005-E5**


Outside Diameter      Micron      End Cap


**LEGEND**


<b>Outside Diameter:</b> 25 = 2.5" 10 = 10" 195 = 19.5" 20 = 20" 2914 = 29 1/4" 30 = 30" 39 = 39" 40 = 40"	<b>Micron:</b> 1 = 1 Micron 5 = 5 Micron 10 = 10 Micron 20 = 20 Micron 50 = 50 Micron	<b>End Cap:</b> No symbol = Double Open F = Double Open Cap 0 = 222/Flat (SOE) 5 = 222/Fin (SOE) 6 = 226/Flat (SOE) 7 = 226/Fin (SOE)
<b>O-Ring Material:</b> E = EPDM (BLACK) N = Buna-N S = Silicone (RED) V = Viton		

  
DOE

  
222/FLAT

  
222/FIN

  
226/FLAT

  
226/FIN

*End cap, special lengths and diameters available.*



JUST ADD WATER™

P.O. Box 2235 Chino Hills, CA 91709 | USA  
sales@hydronixwater.com • www.HydronixWater.com