

RO / TP SERIES REVERSE OSMOSIS TANKS

are NSF approved under Standard 58 and CE approved under the PED (Pressure Equipment Directive). Through these approvals our tanks carry the appropriate markings and can be used anywhere in the world.




FEATURES

- Base Included
- Pre-Charged Tanks
- Side Stainless Steel Air Connector
- Certified to NSF/ANSI Standard 58

PRODUCT SPECIFICATIONS

Max. Temperature: 104 °F (40 °C)
Max. Working Pressure: 100 PSI (6.89 BAR)

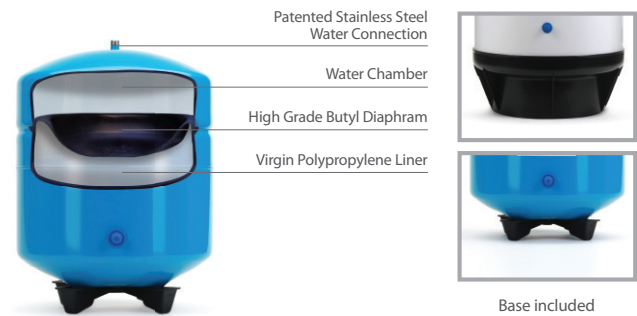

RO / TS SERIES - SPECIFICATIONS															
PART NUMBER	DESCRIPTION	CONNECTION	COLOR	DIMENSION						VOLUME		SHIPPING (Box)		SHIPPING (Box)	
				Height		Diameter		Base Height				Volume		Weight	
				inch	cm	inch	cm	inch	cm	gal	litter	CBM	Cuff	Lbs	Kgs
RO-120-W14	2 Gallon, SS Tank	1/4" NPT	White	12.7	31.7	8.1	20.3	-	-	2	8	0.016	0.55	4.92	2.23
RO-122-W14	3.2 Gallon, SS Tank.	1/4" NPT	White	14.6	36.6	9.8	24.4	-	-	3.2	12	0.02	0.72	6.22	2.82
RO-132-W14	4.4 Gallon, SS Tank	1/4" NPT	White	14.7	36.8	11.2	27.9	-	-	4.4	18	0.03	1.03	8.05	3.65
RO-132-B14	4.4 Gallon, SS Tank	1/4" NPT	Blue	14.7	36.8	11.2	27.9	-	-	4.4	18	0.03	1.03	8.05	3.65
RO-132-BLK14	4.4 Gallon, SS Tank	1/4" NPT	Black	14.7	36.8	11.2	27.9	-	-	4.4	18	0.03	1.03	8.05	3.65
RO-152-W14	5.5 Gallon, SS Tank	1/4" NPT	White	15.6	39	11.6	29	-	-	5.5	21	0.036	1.3	10.40	4.73
TP-35	9.2 Gallon, SS Tank	1/4" NPT	White	21.2	53.8	12.5	31.8	1.7	4.5	9.2	35	0.056	1.93	15.79	7.16
RO-1070-W14	14 Gallon, SS Tank	1/4" NPT	White	25	62.6	15.5	38.9	4.2	10.4	14	60	0.09	3.3	23.50	10.66
RO-1070-W34	14 Gallon, SS Tank	3/4" NPT	White	25	62.6	15.5	38.9	4.2	10.4	14	60	0.09	3.3	23.50	10.66
RO-2000-W34	20 Gallon, SS Tank	3/4" NPT	White	31.6	79	15.5	38.9	4.2	10.4	20	80	0.13	4.5	31.86	14.45
TP-100	28 Gallon, SS Tank	1" NPT	White	31.6	80.4	16.9	43	5	12.9	28	100	0.16	5.7	41.73	18.93
TP-150	40 Gallon, SS Tank	1" NPT	White	41.9	106.5	16.9	43	5	12.9	40	150	0.21	7.4	58.86	26.75

*The volume above is total capacity, not water storage volume.