



Tested and certified by NSF International to ANSI/NSF Standard 61 for material requirements only.


Filter Protection Valves

- Kills water hammer
- Limits water pressure
- Available in 40, 60, 70 and 125 PSI limits

OPERATING DATA

Flow: 4 Gal/min (15L/min) at 100 PSI
 Max. Temperature: 104°F (40°C)

Filter Protection Valves 1/4" Tube Inlet/Outlet

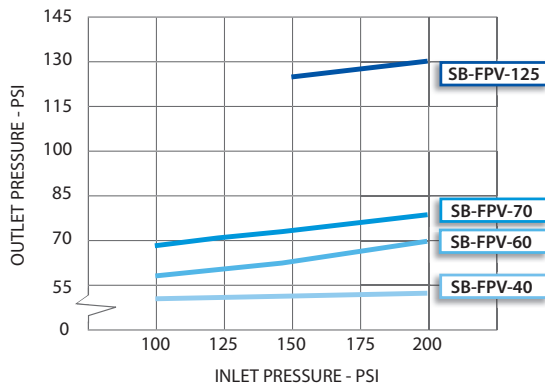

For SB-FPV-40, 60, and 70: Testing Standard Pressure = 100 PSI (Tolerance ± 0.05)
 For SB-FPV-125: Testing Standard Pressure = 150 PSI (Tolerance ± 0.05)

SHOKBOK SERIES PERFORMANCE SPECIFICATIONS

MODEL	PSI SPECIFICATION	MAX. INLET PRESSURE (PSI)	OUTLET PRESSURE (PSI)
SB-FPV-40	40	100	40
	40	150	44
	40	200	50
SB-FPV-60	60	100	60
	60	150	64
	60	200	70
SB-FPV-70	70	100	68
	70	150	72
	70	200	74
SB-FPV-125	125	150	130
	125	250	135
	125	300	140

SHOK BLOK SERIES SPECIFICATIONS

	PART NUMBER	DESCRIPTION	CASE QUANTITY	BOX DIMENSION (IN)	WEIGHT (LBS)	WEIGHT (KGS)
40 PSI	SB-FPV-40	NSF, Pressure Limiting Valve 40 PSI, 1/4" QC Tube Inlet/Outlet	100	8 x 8.5 x 12	16	7.26
	SB-FPV-40/38	NSF, Pressure Limiting Valve 40 PSI, 3/8" QC Tube Inlet/Outlet	100	8 x 8.5 x 12	16	7.26
60 PSI	SB-FPV-60	NSF, Pressure Limiting Valve 60 PSI, 1/4" QC Tube Inlet/Outlet	100	8 x 8.5 x 12	16	7.26
	SB-FPV-60/38	NSF, Pressure Limiting Valve 60 PSI, 3/8" QC Tube Inlet/Outlet	100	8 x 8.5 x 12	16	7.26
70 PSI	SB-FPV-70	NSF, Pressure Limiting Valve 70 PSI, 1/4" QC Tube Inlet/Outlet	100	8 x 8.5 x 12	16	7.26
	SB-FPV-70/38	NSF, Pressure Limiting Valve 70 PSI, 3/8" QC Tube Inlet/Outlet	100	8 x 8.5 x 12	16	7.26
125 PSI	SB-FPV-125	NSF, Pressure Limiting Valve 125 PSI, 1/4" QC Tube Inlet/Outlet	100	8 x 8.5 x 12	16	7.26

Distributed by:

HYDRONIX WATER TECHNOLOGY

P.O. Box 2235 Chino Hills, CA 91709 | USA
 sales@hydronixwater.com • www.HydronixWater.com
 LIT-SB-DS 09/12/18