

EC Series

Empty Cartridges

- ✓ Durable construction
- ✓ Available in a variety of sizes
- ✓ Clear and opaque options
- ✓ High flow design



HYDRONIX EC SERIES EMPTY CARTRIDGES

are available in a variety of popular sizes. They are durable, impact resistant and offer exceptional flow rates.

Hydronix EC Series Cartridges can be filled with multiple type of media for your required application.

2" DIAMETER SPECIFICATIONS - INLINE CARTRIDGES

	Part Number	Description	Case Qty	Box Dimension (Inches)	Weight (lbs)	Weight (kgs)
10"	EC-2010C	Inline, 2" OD x 10" L, 1/4" FNPT, Clear	25	17 x 17 x 11	9	4.08
	EC-2010W	Inline, 2" OD x 10" L, 1/4" FNPT, White	25	17 x 17 x 11	12	5.44

2.5" DIAMETER SPECIFICATIONS

	Part Number	Description	Case Qty	Box Dimension (Inches)	Weight (lbs)	Weight (kgs)
10"	EC-2510C	2.5" OD x 10" L, Clear	25	17 x 17 x 11	9	4.08
	EC-2510W	2.5" OD x 10" L, White	25	17 x 17 x 11	9	4.08
20"	EC-2520W	2.5" OD x 20" L, White	25	17 x 17 x 11	12	5.44

4.5" DIAMETER SPECIFICATIONS

	Part Number	Description	Case Qty	Box Dimension (Inches)	Weight (lbs)	Weight (kgs)
10"	EC-4510C	4.5" OD x 10" L, Clear	12	17 x 17 x 11	12	5.44
	EC-4510W	4.5" OD x 10" L, White	12	17 x 17 x 11	12	5.44
20"	EC-4520C	4.5" OD x 20" L, Clear	6	14 x 9.5 x 21	12	5.44
	EC-4520W	4.5" OD x 20" L, White	6	14 x 9.5 x 21	12	5.44

EC SERIES

Empty Cartridges
Data Sheet

Features & Benefits

- Durable Construction
- Excellent Flow Rate
- Pre/Post Filter Media

Materials of Construction

EC Series - 2510, 2520, 4510 & 4520

- Clear Body: ABS
- White Body: High Impact Polystyrene (Hips)

- EC-2010C: SAN
- EC-2010W: Polypropylene

End Caps: High Impact Polystyrene

Gasket: Buna-N




EC-4520C

EC-4520W

EC-2520W

EC-2520W

Model # Guide

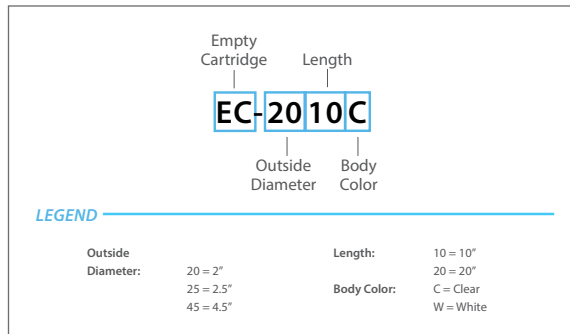

EC-2010C

EC-2510C

EC-4510C



EC-2010W

EC-2510W

EC-4510W


WARNING: Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

NOTE: A drinking water cartridge may contain carbon fines (very fine black powder). After installation and before using water, follow the instructions for flushing the cartridge to remove fines.

NOTE: It is recommended that you flush for 20 seconds prior to using the water for drinking or cooking purposes.

NOTE: Chlorine reduction is the estimate of capacity using 2 ppm free available chlorine (FAC) at continuous flow greater than 75% reduction.

Distributed by:



JUST ADD WATER™

P.O. Box 2235 Chino Hills, CA 91709 | USA
sales@hydronixwater.com • www.HydronixWater.com